




Egret® EVA foam Tape

EGEVA-6

SECTION 1: DESCRIPTION & BENEFITS

- 6mm high-density closed-cell EVA foam as carrier
- Coated with special formula of very high tack adhesive
- Laminated with yellow paper easy release liner
- Excellent properties of toughness
- Outstanding impact resistance, wear resistance
- Good filter material compatibility
- Great thermal sealing, moisture sealing
- Outstanding conformity to uneven surfaces

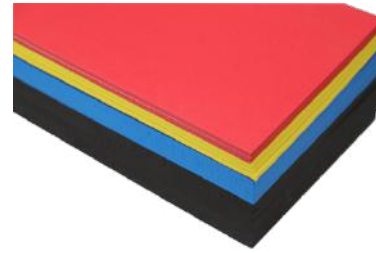


SECTION 2: SPECIFICATIONS

Product Characteristics	Performance Data	Test Method
Carrier Color	Black/Red/Yellow/Blue	Visual
Liner Color	Yellow	Visual
Density	≥ 170 KG/m ³	ASTM D-3575
Peel Adhesion	≥ 8 N/CM	ASTM D-3330
Loop Tack	18 # steel ball	GB/T 4852-84
Tensile strength	20 N/CM	ASTM D3759
Elongation	≥ 150%	ASTM D-3330
Temp Resistance	-30°C~80°C	

SECTION 3: APPLICATIONS & OTHER DETAILS

- Shock resistant material for electronic devices
- Duct work and pipe thermal insulation
- Railway, automobile shockproof sealing material
- Home appliance sound insulation and shock absorption



Sliced roll width available (or customized): 10-1600mm

Standard Length: 100-2000mm

Tolerance: Thickness: +/- 10% Width: +/-1.0mm Length: +/- 0.5mm

Storage: Indoor storage: -5°C-40°C (humidity: <80%), cool & dry, free of direct sunlight

Shelf Life: 12 months in room temp.

N.B. Please keep the operating surface clean, dry, and free of grease or other dirt & dust. So that **Egret Tape** can have a best performance.

Changzhou Egret Manufacturing Co., Ltd

No.4, Tongshun Rd, Henglin Town, Changzhou 213101 • China

T: +86 519 8878 9969 Ext. 807 Email: info@egretmfg.com Website: www.egretmfg.com